



Low Cost Regular Safety Valve - EPV 2x21 / EPV 2x23/24/25


EPV 2x21 is a low cost regular Safety Valve especially built for low pressure. Built for high pressure the EPV 2x23/24/25 is full nozzle design with a solid inlet nozzle.

	EPV 2x21	EPV 2x23/24/25
Size	DN 20 to 150	DN 15 to 50
Set Pressure	0.45 bar g up to 16 bar g	0.45 bar g to 400 bar g
Material	0.6025 / GG 25	1.0619 1.4408

Benefits and features

There functional behavior smooth and stable.
 Easy maintenance because of special design features, e.g. one part spindle.
 Dismantling of the valve for lapping of seat and disc without change of set-pressure is possible.

This product is used for the following applications: vapours, gases or liquids; protection of systems downstream of control valves, water supply up to PN 16 and EPV 2x23/24/25 up to PN 400. Internally luberpox coated the EPV 2x21 is suitable for drinking water service.

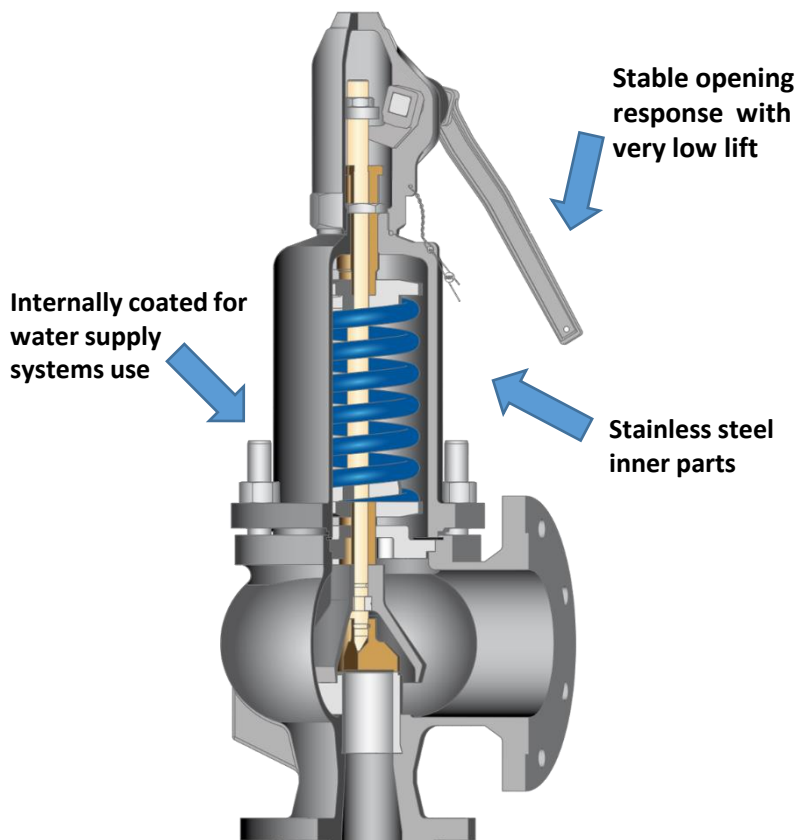

EPV 2321, our cast iron safety valve for basic applications



Spare parts for all safety valves upon request and supported for many years.

